# **HPC-5000**

#### Small Tower Chassis for microATX / Mini-ITX Motherboard



#### **Features**

- Supports microATX / Mini-ITX motherboard
- Supports up to internal two 3.5" or one 3.5" + one 2.5" HDD
- Two USB 2.0 and two USB 3.0 ports in the front side
- Supports up to four FH/FL (10.5") expansion slots

| Quiet                 |
|-----------------------|
| <b>Specifications</b> |

## **C**€ FCC


| Drive Bay                |                        | External   | Internal                                  |
|--------------------------|------------------------|--|---|
|                          | 5.25"                  | -  | -   |
|                          | 3.5" / 2.5"            | -  | 2 x 3.5" * or 1 x 3.5" + 1 x 2.5"         |
|                          | Slim ODD               | 1  | -   |
| Cooling                  | Fan                    | 1 x 12cm system fan in the rear side<br>1 x 8cm system fan in the bottom side (optional) |   |
|                          | Air Filter             | Replaceable air filter (in the bottom side)  |   |
| Front I/O Interface      | USB 3.0                | 2  |   |
|                          | USB 2.0                | 2  |   |
| Miscellaneous            | LED Indicators         | Power  |   |
|                          | Rear Panel             | -  |   |
| Environment              |                        | Operating  | Non-operating                             |
|                          | Temperature            | 0 ~ 40 °C (32 ~ 104 °F)  | -40 ~ 70 °C (-40 ~ 156 °F)                |
|                          | Humidity               | 10 ~ 95% @ 40 °C, non-condensing   | 10 ~ 95% @ 60 °C, non-condensing          |
|                          | Vibration (5 ~ 500 Hz) | 1 Grms   | 2 G                                       |
|                          | Shock                  | 10 G (with 11 ms duration, half sine wave)   |   |
| Physical Characteristics | Dimensions (W x H x D) | 192 x 376.7 x 338.5 mm (7.56" x 14.83" x 13.33"  | ), with chassis feet and key lock bracket |
|                          | Weight                 | 10kg (without MB and HDD)  |   |

\*NOTE: HPC-5000 supports up to four FH/9.5" (Length) expansion cards when two 3.5" HDD bracket installed.


#### **Front View**



#### **Rear View**

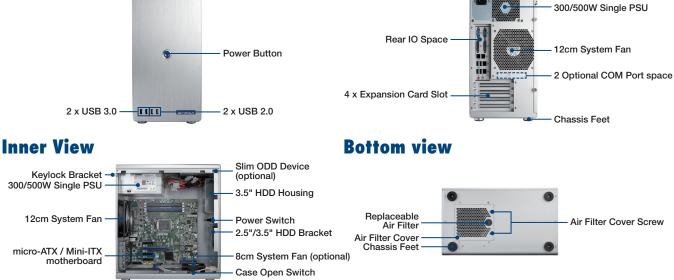

#### HPC-5000

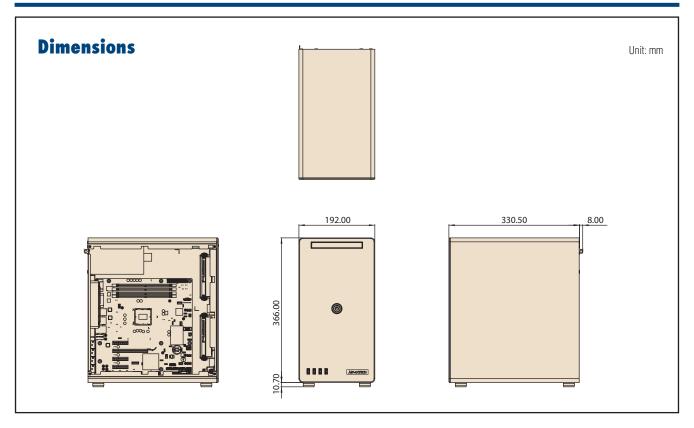

### **Ordering Information**

 Part Number

 HPC-5000-30ZXE

 HPC-5000-50ZXE

Description HPC-5000 small tower chassis with 300W single ATX PSU HPC-5000 small tower chassis with 500W single ATX PSU

### **Packing List**

| Part number    | Description  | Quantity |
|----------------|--|----------|
| 1990022007S000 | Chassis feet (pre-installed)                                       | 4        |
| 1960078418N002 | Key lock bracket (pre-installed)                                   | 1        |
| 1960077474N000 | 3.5" HDD cage (pre-installed)                                      | 2        |
| 1960078421N000 | 2.5" HDD cage  | 1        |
| 1700007351     | SATA HDD cable (40cm)  | 2        |
| 1750008561-01  | 12cm system fan (pre-installed)                                    | 1        |
| 2130017820N000 | System air filter (pre-installed)                                  | 1        |
| 96PS-A300WPS2  | 300W single power supply<br>(Only pre-installed in HPC-5000-30ZXE) | 1        |
| 96PS-A500WPS2G | 500W single power supply<br>(Only pre-installed in HPC-5000-50ZXE) | 1        |

### **Optional Accessories**

| Item                     | Part number                               | Description   | Quantity |
|--------------------------|---|---|----------|
| 2.5" HDD convert module  | 98R15000M00                               | Convert module for two 15mm(H) 2.5" HDDs in a 3.5" cage       | 1        |
| Slim optical device      | Check Advantech P-trade<br>available list | Slim optical device   | 1        |
|                          | 1700019381                                | Slim optical device SATA cable                                | 1        |
|                          | 96CB-SATAPOWER-6P2                        | Slim optical device power cable                               | 1        |
| Air filter               | 2130017820N000                            | System replaceable air filter                                 | 1        |
| System fan               | 1750007983-01                             | 8cm bottom system fan (57CFM)                                 | 1        |
| GPU/GTX card power cable | 1700024754-01                             | 2 x B4P Molex power connector to 6+2P PCIe power cable (10cm) | 1        |
| COM port cable           | 1700001788                                | Single COM port cable for HPC-5000 rear side (30cm)           | 1        |